

SCN-S

Surface-Mount Lighting Control Sensor

Date: _____

Quantity: _____

Company: _____

Project: _____

SCN-S is a surface-mount housing lighting control that enables wireless sensing and control as well as SiteWorx compatibility to third-party luminaires.

The SCN-S makes any luminaire from any manufacturer — intelligent.



Key Features & Benefits

- Easily mounted to a ceiling surface or suitable NEMA 4 junction box
- Bring the power of Bluetooth®, to a wide-range of third-party luminaires
- Continuous dimming (on supported drivers) and utility-grade switched-line power metering (up to the rated amperage)
- Simple, enhanced DALI or 0-10V wiring that doesn't require a separate power supply (on supported drivers)
- A wide temperature range and rating of IP65 make the SCN-S flexible enough for most commercial and industrial environments

Siteworx Software's suite of SiteWorx® applications and an array of smart devices can meter your utilities, monitor your entire facility, and observe critical areas. SiteWorx starts delivering meaningful data and actionable insights right out of the box. Now you can make data-informed decisions, spot hidden problems, and take immediate action. All while keeping your people safe and productive and your operation efficient and sustainable.

SiteWorx Tune is an intelligent lighting control application that uses smart sensors and advanced cloud-based software to maximize energy savings, improve productivity, and maintain safe, comfortable light levels. It brings new control and savings to your lighting infrastructure. With SiteWorx Tune, you can stay informed via the Savings dashboard, which displays real-time energy usage and savings data.

Siteworx Software products are designed and manufactured to satisfy the highest quality standards of customers worldwide. Our products deliver performance, reliability, and long life and are supported by a global network of partners and product specialists.

Specifications

SENSING AND CONTROL

Wireless Networking

- IEEE 802.15.4
- 2.4 GHz Band
- Integrated Bluetooth Low-Energy (BLE)

Connected IoT Platform

- SiteWorx Facility Insights Application Suite

Onboard Intelligence

- Distributed sensing and control
- Facility usage and data-logging

Sensor Capabilities

- Integrated PIR occupancy sensor
- Integrated daylight sensor
- SR/DEXAL driver-ready

Dimming Interface

- Dim range based on driver
- 0-10 V dimming and switching when used with DLA-FA or DLA-CA adapters
- 0-10V with auxillary power when used with appropriate drivers
- DALI-compatible

Device Limit

- DALI
 - Up to (4x) DLA-FA or DLA-CA adapters, or (16x) DALI¹, SR², or DEXAL² drivers
- 0-10V with auxillary
 - Up to (4x) 0-10V with auxillary enabled drivers

ELECTRICAL

Input Voltage

- DALI
 - 12 to 22.5 VDC, 16 VDC Typical, DALI bus powered
- 0-10V with auxillary
 - 12 to 24 VDC auxillary powered with appropriate driver

Power Consumption

- 0.5 W maximum — DALI and 0-10V with auxillary

Power and Control Wires

- DALI
 - Yellow/White: DALI+
 - Yellow: DALI-
- 0-10V with auxillary
 - Purple: 0-10 VDC +Dimming
 - Pink: 0-10V -Dimming
 - Black: Auxillary power

ENVIRONMENTAL

Operating Temperature

- -30° to 50°C (-22° to 122°F)

Operating Humidity

- 0% to 95% non-condensing

PHYSICAL

Enclosure

- PC/ABS Polymer

Dimensions (H x W)

- 53 x 124 mm (2.1 x 4.9 inches)

Weight

- 140 g (5 oz)

Mounting Method

- (2x) Fasteners, backing plate

Mounting Hole Spacing

- 89 mm (3.5 inches)

Mounting Height

- 2.4 to 6.1 m (8 to 20 ft)

WARRANTY

- 5-Year Limited

CERTIFICATIONS & SAFETY

Approbations

- UL/cUL, CE, FCC Part 15 Class B, CISPR 22, SR Certified

Environmental Suitability

- IP65 (when installed within appropriate third-party luminaire housing)



Footnotes:


¹ DALI drivers require a separate DALI power supply in order to power the SCN.

² With SR and DEXAL drivers, to prevent damaging the SCN, ensure that no more than (1x) driver has the power bus enabled.


Ordering Information

Part Number	Description
SCN-S-00-D	SiteWorx Core Node, Surface, 0-10V, High Density Lens
SCN-S-01-D	SiteWorx Core Node, Surface, DALI, High Density Lens

Dimensions

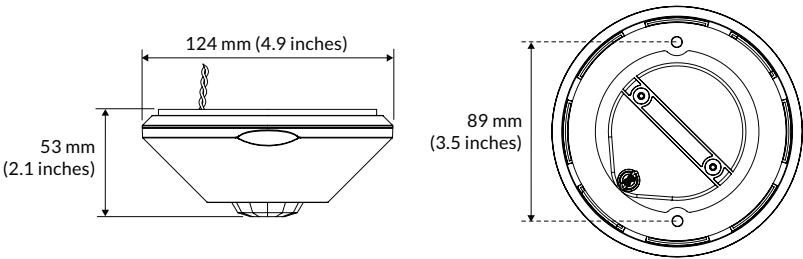


Wiring Diagram

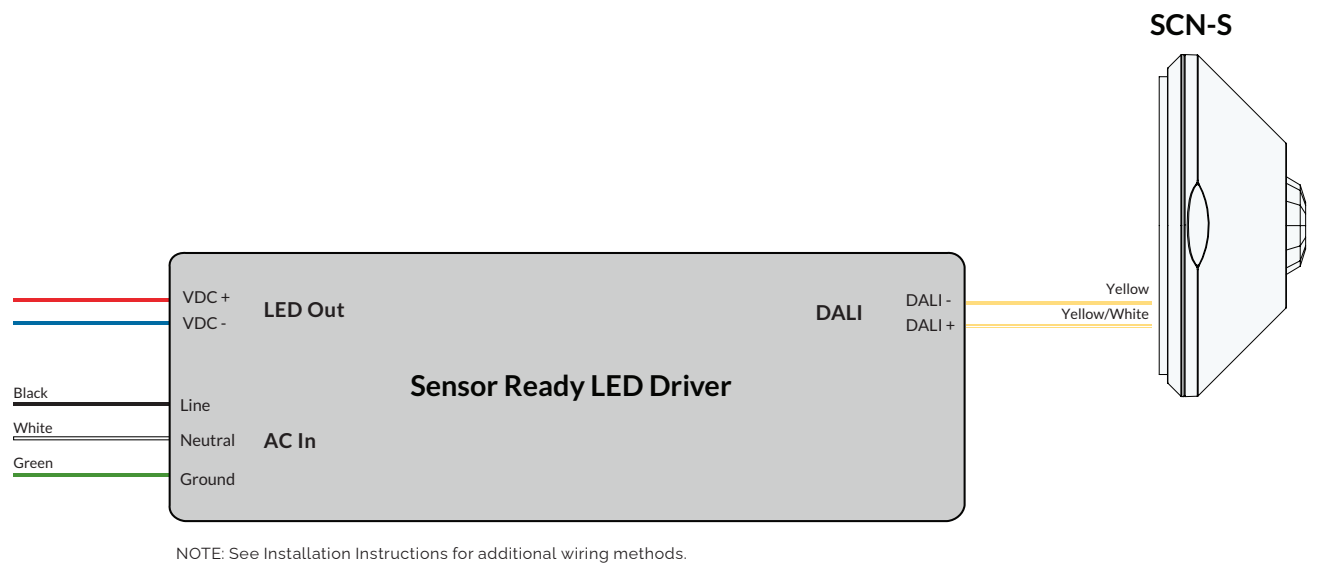


Sensor Coverage

Top View

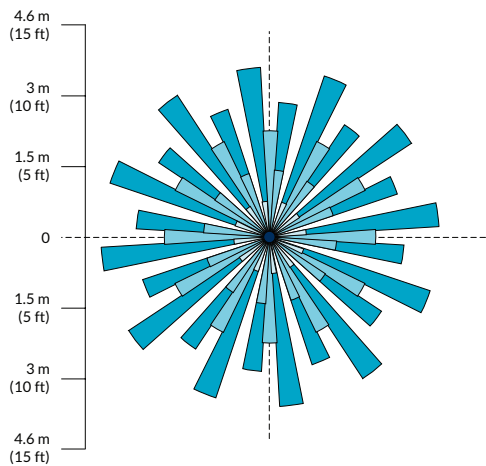

Side View

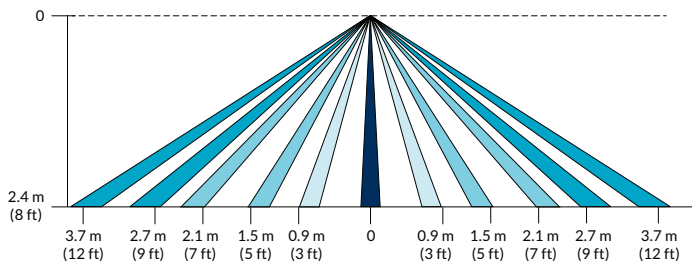

Copyright © 2023 Siteworx Software USA LLC. All rights reserved. We Generate Facility Wellness, SiteWorx, LightRules and any other trademark, service mark, or tradename (collectively "the Marks") are either trademarks or registered trademarks of Siteworx Software USA LLC in the United States and/or other countries, or remain the property of their respective owners that have granted Siteworx Software the right and license to use such Marks and/or are used herein as nominative fair use. Due to continuous improvements and innovations, specifications may change without notice.